


# Reduc Micro 17

## Description

Reduc Micro 17 is an acoustic overlay flooring product suitable for use on new and existing timber and concrete floors. The substrate layers of moisture-resistant MDF and fibreboard are separated by visco-elastic sound damping strips. The underside incorporates a resilient layer of acoustic felt, which provides mechanical isolation from the existing floor structure.

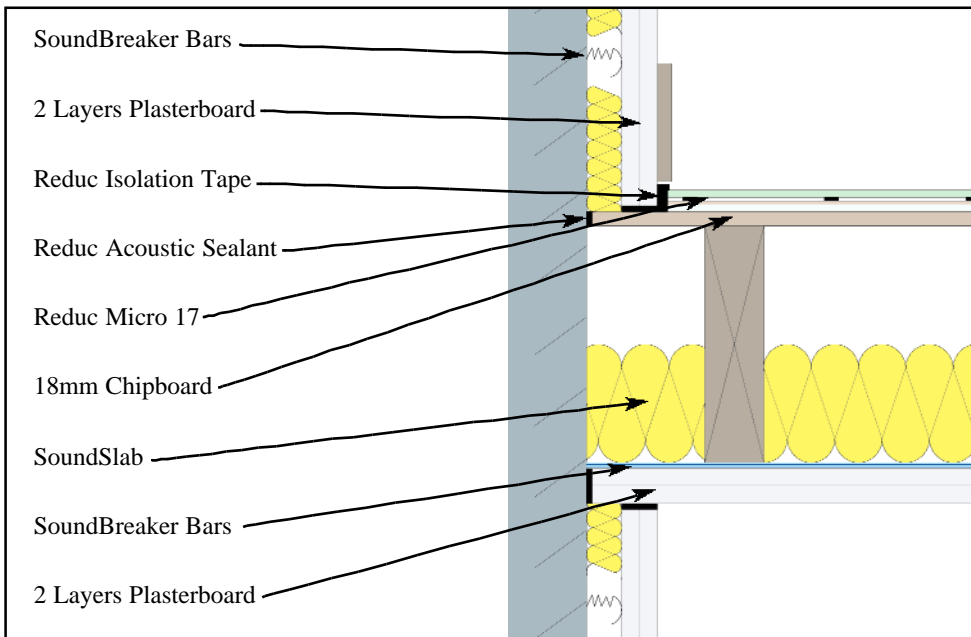

Reduc Micro 17 is 17mm thick and is designed to damp vibration and attenuate both airborne sound and impact noise passing through floors with minimum loss in room height.

The moisture-resistant upper surface means Reduc Micro 17 can be used throughout the building, including kitchens and bathrooms, whilst the acoustic felt on the underside will contour over minor irregularities in the surface of the floor being treated.

## Application

Reduc Micro 17 is used extensively to upgrade separating floors when converting existing buildings into apartments to comply with Building Regulations.

## Technical Advice and Acoustic Testing

Highly qualified and experienced building and acoustic engineers are available to discuss all aspects of acoustic performance requirements and can prepare specifications and effective installation instructions to ensure optimum performance is achieved. They can also undertake pre- and post-installation testing for airborne and impact sound insulation, if required. Further details are available on request.

## Operating Temperature

Reduc Micro 17 is suitable for use at normal building temperatures.

## Fire Performance

Reduc Micro 17 will not add significantly to any existing fire hazard when properly installed.

Data Sheet  
2006 Issue 04

Crown Business Park  
Old Dalby  
Melton Mowbray  
Leicestershire  
LE14 3NQ  
Tel: 01664 821810  
Fax: 01664 821820

E-mail:  
info@hodgsongroup.co.uk

Web Site:  
www.acoustic.co.uk

## Dimensions and Weight

Reduc	Installed Thickness mm	Overall Board Dimensions Excluding Lap Joint	Laid Area per Board Allowing for Lap Joint	Weight	
				Per m <sup>2</sup>	Per Board
Micro 17	17	1175mm x 575mm	0.675m <sup>2</sup>	9.1kg	6.5kg

## Building Regulation Requirements

Building Regulations Approved Document E (England and Wales) 2003 and Building Standards Part H (Scotland) 1990 (as amended) call for the following standards to be achieved for all timber and concrete floors:

Building Regulations Approved Document E (England and Wales) 2003	Airborne Noise	Impact Noise
		$D_{nT,w} + C_{tr}$ dB
Conversions	43 or greater	64 or less
New Build	45 or greater	62 or less

Building Standards Part H (Scotland) 1990 (as amended)	Airborne Noise	Impact Noise
		$D_{nT,w}$ dB
New Build and Conversions	52 or greater	61 or less

## Acoustic Performance

Detailed below are acoustic test results for a typical timber and Type 1 concrete floor construction. Performance data for other floor constructions together with more detailed technical advice is available on request.

Typical Floor Construction	Airborne Sound Weighted Standardised Level Difference		Impact Sound Weighted Standardised Pressure Level
	$D_{nT,w}$ dB	$D_{nT,w} + C_{tr}$ dB	$L'_{nT,w}$ dB
Reduc Micro 17 overlaid onto 18mm chipboard with 100mm SoundSlab fitted between 50mm x 225mm timber joists at 400mm centres and 2 layers of plasterboard to the underside to form the ceiling	51	43	58
As above incorporating SoundBreaker Bars to de-couple the ceiling below	57	50	50
Reduc Micro 17 overlaid onto 22mm timber floorboards with 100mm SoundSlab between timber joists and 30mm lath and plaster ceiling in good condition	55	48	57
Reduc Micro 17 on 365kg/m <sup>2</sup> concrete floor with plaster skim ceiling provides a Weighted Improvement ( $\Delta L_w$ ) of 22dB compared with Building Regulations minimum requirement of 17dB.			

## Flanking Transmission

The performance figures quoted above are based on test results for timber and concrete floors and can only be expected if the building design and construction has followed good practice to ensure all potential flanking paths have been eliminated. In order for wall and floor constructions to be fully effective, extreme care should be taken to correctly detail the junctions between the separating wall or floor and the associated elements such as external walls and any penetrations. If junctions are incorrectly detailed, the acoustic performance will be limited and Building Regulation requirements may not be achieved in practice.

## Packaging and Handling

Reduc Micro 17 boards are packed in non-returnable cardboard cartons on non-returnable pallets. Boards should be stored inside and under cover in a dry, well-ventilated area. Cartons should be laid flat and kept off the ground. Extreme care should be taken when handling to avoid damage.

## Application and Fixing

- See separate sheet.

## Availability

Reduc Micro 17, SoundSlab, SoundBreaker Bars, Reduc Joint Adhesive, Reduc Isolation tape and Reduc Acoustic Sealant are available through a national network of stockists, distributors and builders merchants. Further details available on request.

### For Further Information contact Hodgson & Hodgson Group Ltd

Crown Business Park  
Old Dalby  
Melton Mowbray  
Leicestershire  
LE14 3NQ  
Tel: 01664 821810  
Fax: 01664 821820

E-mail:  
info@hodgsongroup.co.uk

Web Site:  
www.acoustic.co.uk