

Staifix Universal Wall Starter System


for joining new walls to existing masonry




Insert



Turn



Slide



**CHANCE TO WIN £500
WITH EACH PACK**


Application

Wall starter system with all the necessary fixings (ties, plugs and screws) to join a single skin of masonry 2.4 metres high to an existing wall.


Ideal for the construction of conservatories, extensions and garden walls.

Installation


This wall starter will resist a wind load of up to 4.5kN over a height of 2400mm. Prior to installation remove any render, debris etc from the existing wall in the area where the new wall will be joined.

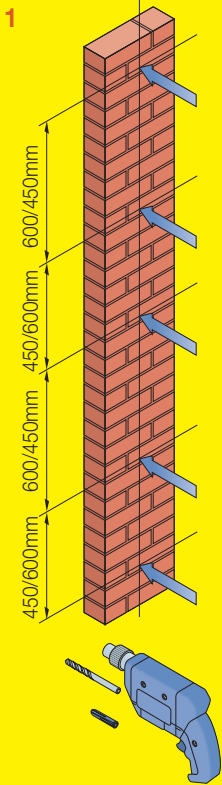

Mark the position of the five fixing holes so that the wall starter system is central to the new wall. When overlapped, the strips should be fixed through the first and last slot, at the point of overlap and at two other points in between. Drill 10mm diameter holes and install plugs.

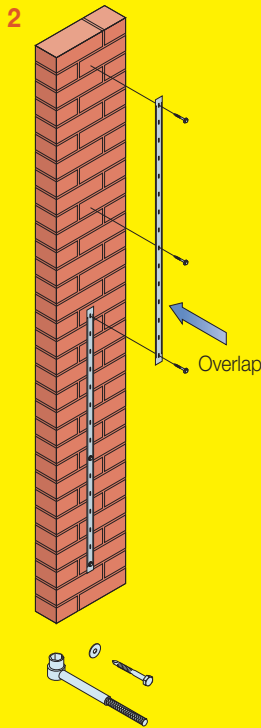

Loosely fix first strip at the bottom two fixing points. Insert second strip into the top of the first strip and loosely fix at the remaining three fixing points. Fully tighten screws, in any order, when both strips are in position.

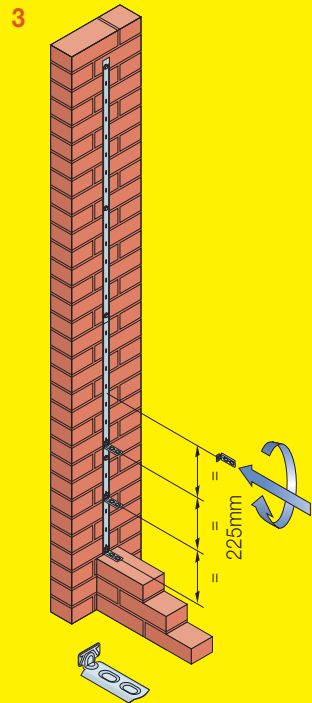

Insert wall ties as shown and build into the bed joints of the new wall ensuring they are surrounded by mortar. Repeat up to a maximum height of 8 metres.