


PRODUCT DESCRIPTION	AIRBORNE PERFORMANCE $D_{nT,W} + C_{tr}$	IMPACT PERFORMANCE $L'_{nT,W}$
Karma Acoustic UnderScreed	49 dB	49 dB

NB – Pre-completion testing requirements for separating floors in England and Wales are different to Scotland. See pages 4-6 of this guide.

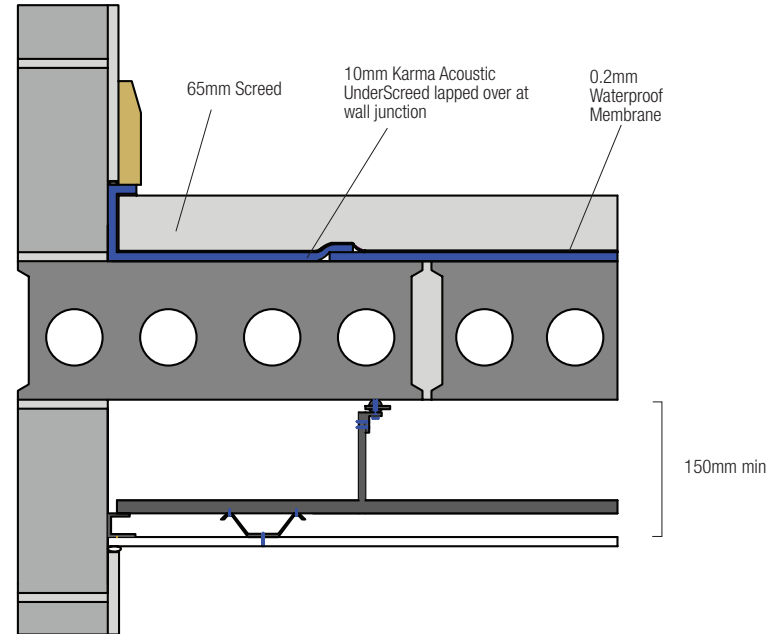

## UNDER SCREED PRODUCTS

Under screed products are designed for use in new build concrete applications providing isolation and impact sound attenuation.



### KARMA ACOUSTIC UNDERSCREED

- Sustainable product made from 100% recycled rubber
- Suitable for use with under floor heating systems
- Product can be lapped over to form integral flanking detail
- Dimensions 5mm x 1150mm x 2300mm

### Solution Ref: KF-004

#### BENEFITS

- Suitable for both sand cement and proprietary screeds
- Protects expansion joints
- Offers high performance over time as the product does not suffer from creep, even under high loading points

#### TYPICAL APPLICATIONS

- New build concrete floor applications
- Apartments including professional and student accommodation, hotels