


Knauf Wallboard

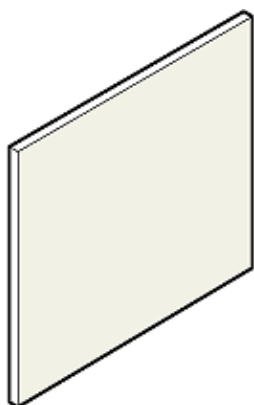

Knauf Wallboard is plasterboard with an ivory paper face ideally suited to receive a plaster finish or for direct decoration. Knauf Wallboard complies fully with BS EN520 and is categorised as Type A.

Knauf Plasterboards have a conductivity figure of $k = 0.16 \text{ W/mK}$

Thermal Resistance:

9.5mm = $0.06\text{m}^2 \text{ K/W}$

12.5mm = $0.08\text{m}^2 \text{ K/W}$

15.0mm = $0.09\text{m}^2 \text{ K/W}$

Square Edge

Dimensions (mm)			Article No	Pack Details		
Thickness	Width	Length		Boards	m^2	Tonnes (Approx)
9.5	900	1800	312 02 418	100	162	1.00
		2400	312 02 424	100	216	1.34
	1200	2400	312 02 224	92	265	1.64
12.5	900	1800	313 02 518	80	129.6	1.08
		2400	313 02 524	80	172.8	1.44
	1200	2400	313 02 224	72	207.4	1.72
		2700	313 02 267	60	194.4	1.61
15	900	3000	313 02 230	60	216	1.79
		2400	314 02 424	60	129.6	1.30
	1200	2400	314 02 224	60	172.8	1.73

Tapered Edge

Dimensions (mm)			Article No	Pack Details		
Thickness	Width	Length		Boards	m^2	Tonnes (Approx)
9.5	900	2400	312 01 424	100	216	1.34
		1200	2400	312 01 224	92	265
			2700	312 01 267	80	259.2
12.5	900	1800	313 01 518	80	129.6	1.08
		2400	313 01 524	80	172.8	1.44
	1200	2400	313 01 224	72	207.4	1.72
		2500	313 01 225	72	216	1.79

		2700	313 01 267	60	194.4	1.61
		3000	313 01 230	60	216	1.79
15	900	1800	314 01 418	60	97.2	0.97
		2400	314 01 424	60	129.6	1.30
	1200	2400	314 01 224	60	172.8	1.73
		2700	314 01 327	48	155.5	1.59
		3000	314 01 300	48	172.8	1.76