


PREMIER SMOOTH

URNS TEXTURED CEILINGS AND WALLS BACK TO A SMOOTH AND FLAT FINISH

MIX WITH COLD WATER

- ✓ Easy to work with, mixes easily and slides on, saving time and money
- ✓ One day operation
- ✓ Turns textured and uneven surfaces back to flat
- ✓ Dries to a white finish
- ✓ Gives a professional finish time after time

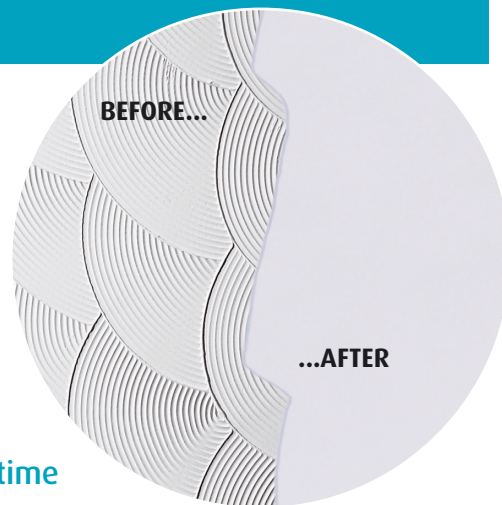

TEXTURING SYSTEMS

General Information

Premier Smooth is a cold mix compound, which turns textured or uneven ceilings and walls back to a smooth and flat finish.

Premier Smooth has been specially formulated in such a way that the general public, do-it-yourself enthusiasts right up to experienced site contractors can use it with total confidence to smooth out any internal surface, from old texture, Spanish plaster, general plaster and even old and flaky uneven painted surfaces. **Premier Smooth** will achieve a multi-plaster finish without the complexities of professional plastering.

Coverage

One bag of **Premier Smooth** has a coverage of 12m² at 2mm thickness.

Surface Preparation

All surfaces must be clean, sound and dry prior to application. For application on textured and uneven surfaces, any loose material must be removed. Any visible cracks must be repaired using Wondertex White Paper Jointing Tape. For application on papered, flaky or distempred surfaces, remove previous decorative material and seal using Wondertex Stabiliser.

Mixing

Slowly add **Premier Smooth** into a clean mixing bucket of cold water (12-14 litres is sufficient for a 25kg bag), continuously mixing to avoid lumps (preferably by using a drill and whisk set on a slow speed). Do not mix more than can be applied within 1 hour. Always

leave **Premier Smooth** to stand for a few minutes before application and do not use below 3°C.

Application

Step 1

Apply sufficient mixed **Premier Smooth** to cover the surface using a caulker or plasterers trowel. Do not apply to an area greater than 1m² at a time and repeat this process until the ceiling/wall is completed.

Step 2

Return to the original area covered within 20-30 minutes to complete finishing by splashing the area using a wet paint brush and smoothing over using a caulker or plasterers trowel to achieve a smooth, flat finish.

Step 3

In most applications one coat of **Premier Smooth** is sufficient, however where a second coat is required it should be applied immediately, using the same process, once first coat is firm to the touch.

Painting

Premier Smooth may be painted to give best results, which should take place once the ceiling/wall is dry. Prior to painting, the ceiling/wall should be sealed using Wondertex Sealer. Once this has been carried out, apply one coat of water based emulsion paint.

Packaging

Supplied in powder form in 25kg paper sacks.

Storage

Recommended shelf life 12 months. Store in dry conditions.

Health & Safety

Avoid contact with eyes and ingestion. If splashes enter eyes DO NOT RUB but wash with plenty of water. It is advisable to wear protective gloves and wash off any contact with skin. Wash hands after use. Clean any accidental splashes from floors etc. with warm water before dry.

Health and safety data sheets for all Wondertex products can be obtained from the address below.

Other products

Products in the Wondertex range include:

Wondertex Ultralight Joint Filler

Wondertex Ultralight Joint Cement

Wondertex Premier 5

Wondertex Ready Mixed Joint Cement

Wondertex Drywall Joint Filler

Wondertex Drywall Joint Cement

Wondertex Washable Texture Coating

Wondertex Sealer

New Range of Cove, Cornice and Accessories

Full Range of Tools and Accessories

Tools and accessories

Product code	Description	Size
CA12	Caulker	300 (12 inch)
CA10	Caulker	250 (10 inch)
CA08	Caulker	200 (8 inch)
EB25	Mixing bucket	25L
BU01	Mixing bumper head	
WS20	Sealer – white	20L
SEWH	Sealer – white	5L
ST05	Stabiliser	5L

Note: All 'Wondertex' products are of high quality, being subjected to rigid quality control. 'Wondertex', however, cannot govern conditions of applications and usage, thus any warranty written or implied is given in good faith, but covers materials only. RMC Specialist Products will not accept any responsibility for damage or injury arising from the storage, handling, application or use of its products.

Wondertex[™]
Interior finishing systems

RMC Specialist Products

Units 5C & 5D
Arndale Road
Lineside Industrial Estate
Littlehampton
West Sussex
BN17 7HD

Telephone

01903 725221

Facsimile

01903 717508

Web site

www.wondertex.co.uk

Email

wondertex.sales@rmc.co.uk

A member of the  Group