


Features



Complies with new Part L Building Regulations

Reduces risk of condensation, mould & moisture migration across the cavity

Overcomes cavity width variations

Weather resistant

Easy to install

No ties required - simply nail to blocks

Can be used on timber frame construction

Specifications

Profile

White non water-absorbing PVCu

Insulation

Mineral wool bonded with Ecosse Technology - a sustainable organic material friendly to the environment. HCFC & HFC Free. Zero Global Warming Potential - Zero Ozone Depletion Potential. K Value 0.035 W/mk. Good moisture resistance Knauf Insulation mineral wool (Rocksilk) with Ecosse technology has a resistance to fire which is classified as non-combustible and has a rating of Euroclass A1 to BS EN ISO 13501.

Lengths	Suits Cavity Widths
2.4 metres	50 - 100mm

Minimal thermal resistance path
0.45m²/KW

Regulations

Approved Document Part L revised 2006

With 30mm window frame set-back, complies with Part L thermal path requirements, and is BBA approved for severe weather conditions. The check reveal variant can be used in very severe locations.

Manufactured to ISO 9001:2000

Order codes

Standard: SF Flexicloser
Check Reveal: CSF Flexicloser





Supafix Flexicloser



- Zero GWP - Zero ODP
- BRE Compliant (Doc. L)
- One size fits all 50 - 100mm

Zero GWP
Zero ODP

Supafix Flexicloser is a versatile insulated cavity closer that is easy to use to achieve building regulations where cavity widths are unknown or vary on site. The product is a particularly useful solution in a second fix installation when a frame former is not required.

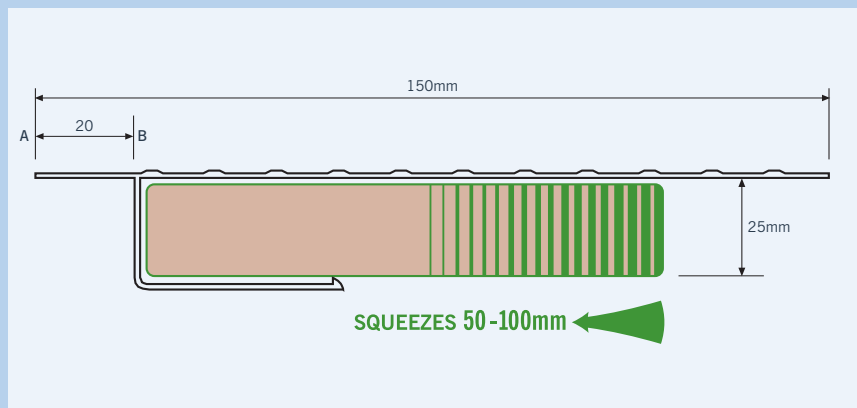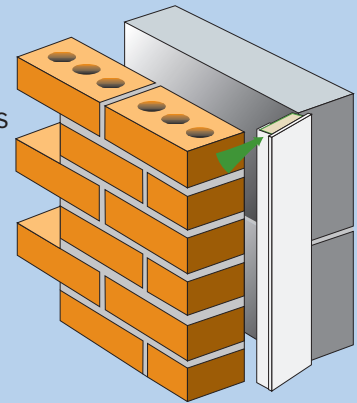

Installation

SF-Flexicloser can be installed in cavity widths 50-100mm. With the white PVCu flange on the outside of the reveal, position the open end of the insulation against the inside edge of the inner block work (Fig a). Push the cavity closer into position (Fig b). Nail through flange into brick and block work before window or door frame installation.

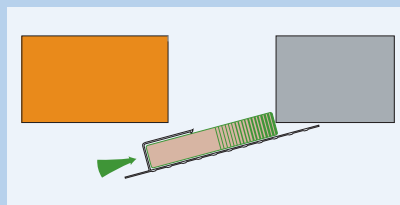


Fig a

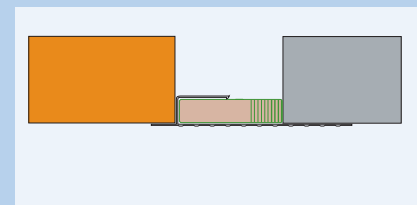


Fig b


QUANTUM PROFILE SYSTEMS LTD.
SALMON FIELDS ROYTON OLDHAM
LANCASHIRE OL2 6JG

SALES & TECHNICAL SUPPORT
0161 622 2020
f: 0161 622 2022 e: sales@dacatie.co.uk

DACATIE INSULATED CAVITY CLOSER
COMPRESS FIT FROM 100mm DOWN TO 50mm

DACATIE
BUILDINGSOLUTIONS

with **ECOSE**[®]
TECHNOLOGY

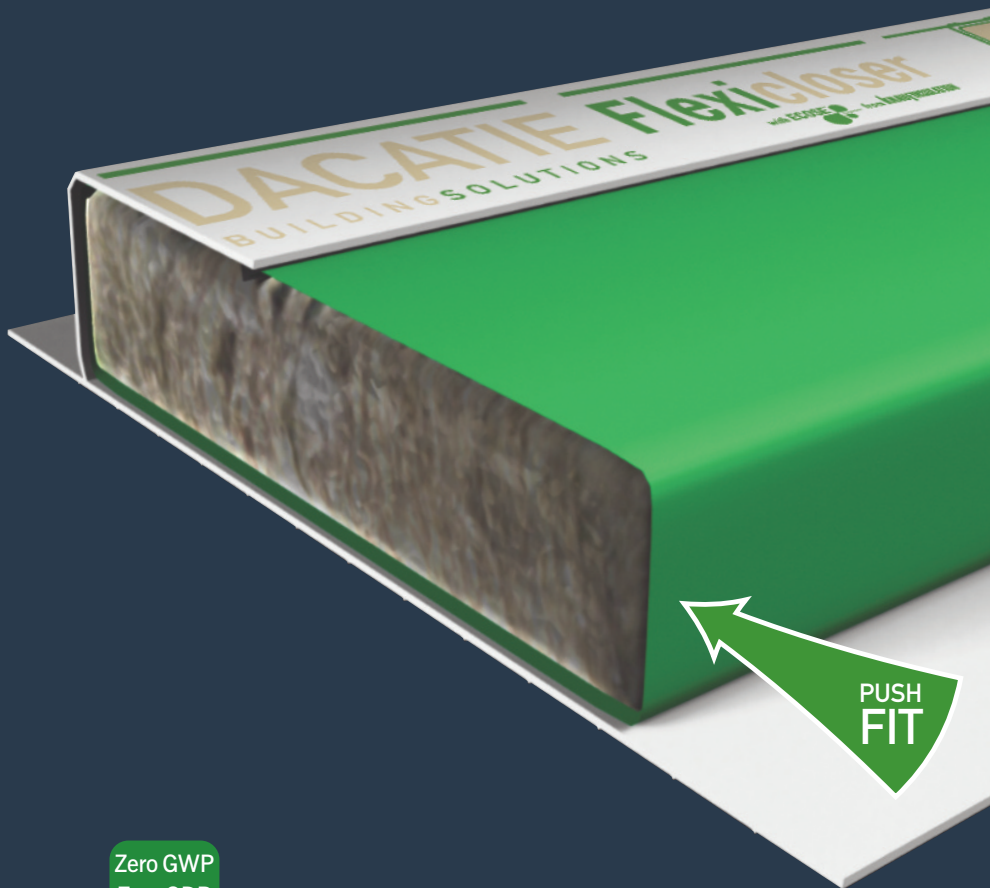

Zero GWP
Zero ODP

- Insulation with Ecosse technology
Green Guide Rating A+
- Zero GWP - Zero ODP
- BRE Compliant
- One size fits all 50 - 100mm

RECOMMENDED FOR CLOSING THE CAVITY AROUND WINDOW
AND DOOR OPENINGS IN SECOND FIX INSTALLATIONS WHEN
A FRAME FORMER IS NOT REQUIRED



KNAUF INSULATION
it's time to save energy

Supafix Flexicloser